


NOZZLES

When using a pressure washer, the nozzle controls the pressure. A larger nozzle creates less pressure for sensitive cleaning jobs. Additional nozzles allow different pressures and spray patterns up to the rated maximum pressure of your washer.

A zero degree nozzle creates all the impact in one small area. A fan nozzle (15°, 25°, 40°) focuses the impact over a greater area. This produces a quicker cleaning pattern with less impact.

The rotating nozzle, with its fast rotation, produces the impact of a 0° nozzle with the faster cleaning action of a fan nozzle.

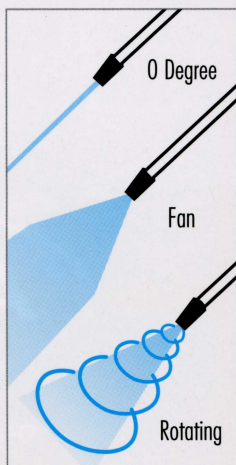

NOZZLE PACKS

4 Pack

- 5000 PSI @ 300° F
- 1/4" Quick connect plug
- 303 stainless steel nozzle body
- Hardened stainless steel orifice insert
- Pack includes 1 ea. of 0, 15, 25, 40 Degree spray angles



5 Pack

- 5000 PSI @ 300° F
- 1/4" Quick connect plug
- 303 stainless steel nozzle body
- Hardened stainless steel orifice insert
- Pack includes 1 ea. of 0, 15, 25, 40, 65 Degree spray angles



SEWER NOZZLES

Non-rotating style:

- 4200 PSI max. pressure
- Backward ports drive the nozzle forward and flush debris
- Forward port blasts into and breaks up clogs/debris
Note - There is no forward port on the 1/8" size in the Non-Rotating Style and also no forward port in all three of the Rotating Style nozzles.
- Corrosion free stainless steel construction
- Physically small for cornering ability



Rotating style:

- 3000 PSI max. pressure
- Rotating style adds extra agitation and surface cleaning



ROTATING NOZZLES



- 3650 PSI max. pressure
- 1/4" Female inlet, 212° F



- 5100 PSI max. pressure
- 1/4" Female inlet, 212° F



- 3625 PSI max. pressure
- 1/4" Female inlet
- 195° F

FOAM NOZZLES

- 6.6 GPM flow rate
- 3200 PSI max. pressure
- 1/4" Female inlet
- 140° F
- 1.5 mm orifice
- Brass meter valve

Foam Cannons



- 1/4" F inlet
- 200° F Max.
- Aluminum body w/SS orifice
- Includes (2) 1/4" M spray tips: 050 & 060



Foam Nozzle

HOSES

IMPAC HOSE ASSEMBLIES

- Wrapped Cover (Black)
- 1 Wire Hose
- 3000 PSI max. pressure
- Ends are Male solid x swivel
- All hoses come with bend restrictors
- 4:1 Burst to operating ratio
- Hose is rated @ 250° F / 310° F Max.



- Wrapped Cover (Black)
- 2 Wire Hose
- 5800 PSI max. pressure
- Ends are Male solid x swivel
- All hoses come with red bend restrictors
- 4:1 Burst to operating ratio @ 5500 PSI
- Hose is rated @ 250° F / 310° F Max.



GOODYEAR HOT PAC (COMBO) HOSE ASSEMBLIES

- Hot Pac hose is specially designed and ideally suited for high temperature, pressure cleaning applications where a highly durable, heat-resistant hose is required.
- Hot Pac can be used with many combination units on the market today and is well suited for use with super-heated water and detergents.
- 1 Wire Hose
- Working Pressure: 3/8" Hose at 250° F @ 3000 PSI
- Working Pressure: 1/2" Hose at 250° F @ 2500 PSI
- Steam: 3/8" Hose 325° F @ 350 PSI
- Steam: 1/2" Hose 325° F @ 350 PSI
- Cover is compounded to resist heat, weather, and oil
- Smooth-Finish Cover
- All hoses are M solid x swivel
- All hoses come with bend restrictors/hose guards



GOODYEAR NON-MARKING HOSE

- Goodyear brand hose is rated @ 250° F
- Non-marking hose is great for use in areas which require the environment to stay scuff-free.
- This hose will not leave black marks when dragged across surfaces.
- Smooth-Finish Cover
- 1 Wire Hose
- 3000 PSI max. pressure
- Ends are Male solid x swivel
- Hose comes with bend restrictors/hose guards
- Pac 3000 is a private label name. This hose is a Goodyear brand hose that is equivalent to the Neptune 3000.



SEWER HOSE

- Slides easily into drain pipes, sewer, and water lines
- Flexible for cornering
- Safe bend radii 0.88" - 1.25"
- Durable construction
- All hose is M x M
- Ends: Solid x Solid / Solid x Swivel
- Note: Z09-00200 & Z09-00201 are 1/8" Hoses with one 1/8" M end & one 1/4" M end.



HOSE REELS


5500 Series - 360° Pivot Power Wash Hose Reels

- Designed for industrial hot or cold water applications.
- Patented design lets reel spin to face same direction hose is being pulled.
- Mounts easily to walls or portable pressure washer frames. 5500 reels easily slide into brackets mounted on walls, carts, or the frames of portable pressure washers. You can easily move the reel to various locations - just grab and lift.
- Rated at 5000 PSI and 325° F.




100 Series Hose Reels "The Challenger"

- Compact, direct hand crank hose reels
- For air, water, and chemical transfer to 4,000 PSI
- Applications include: wash down, pressure washing, agricultural, drain cleaning, pesticide, herbicide, and general maintenance.
- Heavy-duty, solid steel construction
- Durable electrostatic powder coat finish
- Full flow brass swivel inlet
- Direct hand crank rewind in a compact, lightweight reel
- Perfect for mobile applications such as pressure washers and trucks or permanently mount it to the floor, wall, or ceiling.
- Handles product temperatures from -20° F to +225° F.
- Adjustable drag brake eliminates hose backlash while unreeling.
- Manufacturer's 2 year warranty
- Made in USA



STATIONARY REEL


- Model: REEL-D30001 Reel: 3/8" x 50'
- Model: REEL-D30002 Reel: 3/8" x 100'



Mounting Bracket


REEL-99MOUNT Reel Mount

- Complete bracket with bolts, nuts
- Jumper hose for mounting reels to units



DUAL LANCE

- 10.5 GPM flow rate
- 4100 PSI max. pressure
- 1/4" M x (2) 1/4" F
- 300° F
- Length - 40"
- Vented durable plastic grip
- Includes nozzle protector and 60 Degree #40 brass soap tip

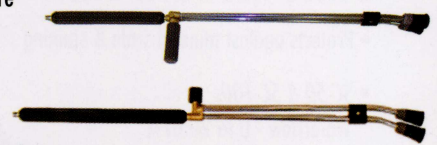

PUSH & PULL LANCE

- Ideal for hard to reach applications such as gutters, underneath fender wells, truck bellies, and heavy equipment.
- Vented grip can be pulled to make lance angle up to 90 degrees.
- "Pump action" allows for quick angle change for hard to reach areas.
- Each desired angle remains stationary until adjusted.
- 3050 PSI
- 1/4" F x 1/4" F
- 300° F



TELESCOPING WAND

- 8 GPM flow rate
- 4000 PSI max. pressure
- 200° F
- 1/4" Hose
- Two aluminum poles and fiberglass outer pole
- Retracted Length: 18' = 6 Feet 6 Inches
24' = 9 Feet



Gutter Cleaner

Screw-type Locking Devices



Wand Belt



SCALE REDUCER UNITS & CARTRIDGES

- Protects against mineral scale & staining
- SC-50 & SC-100:
Waterflow - 0 to 20 GPM
Max. Press. Head & Sump - 125 PSI
Max. Temp. Head & Sump - 125° F
Line Size - 1/2" to 3/4"




WET, INDUSTRIAL-DUTY SAND BLAST KIT

- Optimal performance range of 4 GPM at 3000 PSI to 8 GPM at 5000 PSI
- 1/4" Plug Inlet, bolt hex head type screw
- Kit includes: mixing head, tungsten carbide nozzle, 25' poly braid hose, & probe
- Note - Use 0° nozzle - not included



SURFACE CLEANER

- 8 GPM
- 4000 PSI max. pressure
- 160° F
- Weight: Machine - 19 lbs., Packaged - 25 lbs.



DRAFT DIVERTERS

- Heavy Duty 16 Gauge carbon steel construction
- Painted black
- Separate venting air from combustion



CHEMICALS

Chemical for:

- Transportation
- Parts Washers
- Degreasers
- Institutional and Food Preparation
- Speciality Detergents
- All Purpose
- Car Wash
- Truck Wash
- Bus Wash
- Heavy Grease
- Farm Applications
- Restaurants
- Fleets
- Heavy Construction



OLD VALUES. NEW IDEAS.

